

CHART PROJECTOR

# **CP-500**

#### CHART PROJECTOR CP-500



### CHART PROJECTOR

**SHIN-NIPPON** 

## CP-500

#### 50charts and various masks

Landolt, Letter, Child, Snellen, 50 kinds of charts, and Horizontal line, Vertical line, one chart, various masks can be selected by the remote control box.

#### Fast, slient chart disk rotation

It moves to the following chart in a maximum of 0.3 seconds.

#### User Program mode

2 kinds of programs can be selected. 48 kinds (maximum) of chart and mask are memorizable.

#### Room light swicth

By using optional deviator, operation of a room light is available by the remote control.

1 Lamp switch

SPECIFICATIONS

- 8 Back switch

4 Chart/Mask switch One chart switch 10 Eyeball chart switch


Number of chrats and masks


- - 50charts and 38masks

Luminance	min.80-max.320Cd/m2(200Cd/m2 at 5m)
Chart and mask selection speed	0.3seconds
Program	2 kinds(48charts or masks)
Tilting angle	±10°
Auto power off	After 5 min.
Lamp	12V, 30W halogen lamp
Projection distance	2~7m
Projection magnification	30 x (at 5m)
Projection size	335mm x 222mm (at 5m)
Dimentions	W248xL336xH234mm
Weight	4.5kg
Power source	100~240V
Power consumption	150VA
STANDARD ACCESSORIES	
REMOTE CONTROL BOX SUMA BATTERY X 2 SC	CREEN TEST SCALE SHEET DUST COVER SPARE LAMP SPARE FUSE

REMOTE CONTROL BOX, SUM4 BATTERY X 2, SCREEN, TEST SCALE SHEET, DUST COVER, SPARE LAMP, SPARE FUSE **OPTIONAL ACCESSORIES** 

TABLE BASE STAND, WALL MOUNT, CHART PROJECTOR ARM, POLA FILTER GLASS, R&G GLASS, DEVIATOR

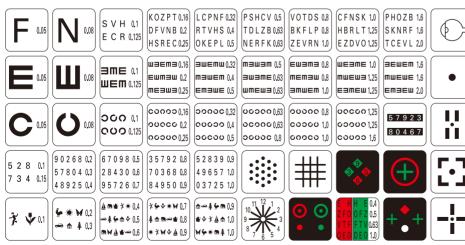

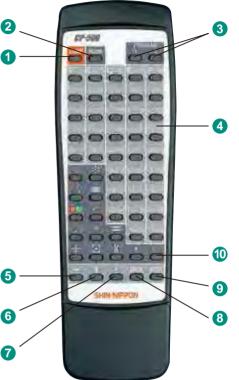

#### Adjustment of the brightness

The brightness of the projector can be changeable by the control switch according to the brightness of the operation room.



#### Design and specifications are subject to change without notice.



#### MERCOFRAMES OPTICAL CORP

5555 Nw 74 Ave. Miami. Fl. 33166. 305-882-0120 ale@mercoframes.net www.mercoframes.net

- 2 Room light switch
- 5 Horizontal line switch
- 3 Program switch (1,2) 6 Vertical line switch
- 9 Next switch