

A-SCAN/BIOMETER AL-100

COMPACT A-SCAN/BIOMETER

DELIGHT IN SIGHT

Small but powerful. As well as easy and intuitively to use.



- Colour touch screen
- Contact / immersion mode
- Internal data storage
- Automated / manual measurement
- 6 IOL- calculation formula
- Memory card drive

 **TOMEY**
TECHNOLOGY AND VISION

THE TOMMY COMPACT A-SCAN/BIOMETER AL-100



QUALITY IN DETAIL

Easy to use

The handling of the AL-100 is very easy due to the clearly structured touch screen interface. You quickly learn how to use the system since the precise indicated icons are conveniently located and follow a logic way of operation. You can measure your patients' eyes by holding the probe in your hand or use the tonometer holder of your slitlamp. All measurements are audio assisted in any case.

Compact and fully equipped

The ergonomic and compact design of the AL-100 gives immediate and convenient access to all operator elements. You have the possibility to customize the unit according to your personal preferences. Six different users as well as 10 IOL's can be added. The patient data are imported with touch screen keyboards, which appear on the screen whenever they are needed. Moreover the AL-100 will calculate your personal corresponding values according to your surgery data. With 6 different pre-set eye types and the adjustable velocity function, you are able to receive precise results, in contact or immersion mode.

State of the art data management

In modern ophthalmology the handling of patient data is a very important factor. With the AL-100 you can choose between 4 different data storage options:

- Conventional printout through built in printer

- Internal memory
- Built in, PC standardized memory card slot
- Integrated RS-232 port for data export

SPECIFICATIONS

AXIAL LENGTH MEASUREMENT

Probe Eye type modes 10 MHz (+/- 10%)
Normal, dense cataract, aphakic, 3 x pseudophakic

MEASUREMENT MODE

Auto 1 Hand-held measurement
Auto 2 Measurement with chin rest
Auto 3 Foot switch

MEASURING RANGE

Axial length 15 to 40 mm
ACD 1.80 to 7.00 mm
Lens thickness 2 to 6 mm

MEASURING ACCURACY

Accuracy +/- 0.1 mm
Resolution 0.01 mm
Sound function Audio-assisted alignment and acquisition of data

Converted velocity IOL calculation formula 800-3000 m/sec
SRK - II, SRK - T, Showa, Holladay, Haigis optimized, Haigis standard


Additional features

IOL storage capacity up to 6 physicians
up to 10 lenses
Display Printer 5.7" colour touch screen
Built in printer (incl. paper save function)
Data storage Internal memory and (optional) memory card
Safety guidelines FDA 510 (K), IEC 1102


DIMENSION & ELECTRIC REQUIREMENTS

Dimensions WDH 220 x 222 x 275 mm
Weight Voltage Approx. 4.0 kg
Frequency Power consumption AC 100 V to 240 V
50 / 60 Hz
Less than 42 VA


DIMENSIONS

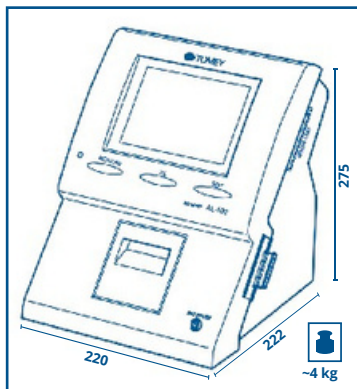

The touch screen allows you to move quickly through the menu



The AL-100 provides full access to ultrasound velocities



Comfortable data transfer to memory card or RS-232 port

2012/04 - subject to change without notice



MERCOFrames
OPTICAL CORP

✉ alan@mercoframes.com
✉ info@mercoframes.net
🌐 www.mercoframes.com
📍 5555 NW 74 AVE.
MIAMI, FL. 33166
☎ P: 305-882-0120
F: 305-882-0140

