One vision, Two sharp eyes with Our Innovation

TMS-4N **Topographic Modeling System**



USB Connection Auto Shot Function Large Patient Database Easy Database Operation Multi-Language Operation Fourier Refractive Analysis Quick Data Reference Built-in LCD Alignment

Keratoconus Screening & Other Applications

TMS-4N SPECIFICATIONS

Ring cone 25

256

31

256

6,400 maximum

5.5 to 10.0 mm (61.36 to 33.75 D)

7,300 maximum

5.5 to 10.0 mm

(61.36 to 33.75 D)

±0.02 mm (Spherical)

800 x 600 or higher

Ø 0.57 to 10.9 mm (43D)

Ø 0.46 to 8.8 mm (43D)

±0.02 mm (Spherical) Manual with auto-correction

Measurement

Measurement type **Ring numbers** Measurement points Measurement points on a ring Minimum / Maximum ring diameter Spherical measurement range

Spherical measurement accuracy Alignment

< CL option only >

Ring numbers Measurement points Measurement points on a ring Minimum / Maximum ring diameter Spherical measurement range

Spherical measurement accuracy

System Requirements

Operating System CPU Memory Interface Display (Resolution)

Main unit

Display Dimensions Weight Power Supply Windows® 7, Windows® 8 Intel® Core™2 Duo processor or higher More than 512 MB USB 2.0 (Connection with a main unit)

5.7 inch color LCD 296(W) x 508(L) x 448(H) mm 14 kg AC 100 to 240V, 50 / 60 Hz 45 to 55 VA

One vision, Two sharp eyes with Our Innovation





- USB Connection
- Auto Shot Function
- Large Patient Database
- Easy Database Operation
- Multi-Language Operation
- Fourier Refractive Analysis
- Quick Data Reference
- Built-in LCD Alignment
- Keratoconus Screening & Other Applications

TOMEY



MERCOFRAMES OPTICAL CORP

5555 Nw 74 Ave. Miami. Fl. 33166 Tel. 305-882-0120 ale@mercoframes.com






One vision, Two sharp eyes with Our Innovation


TMS-4N Topographic Modeling System


Famous, Traditional, **Reliable Topographer**

Corneal Topographer Continues to Set the Standard for Resolution, Accuracy & Corneal Coverage.

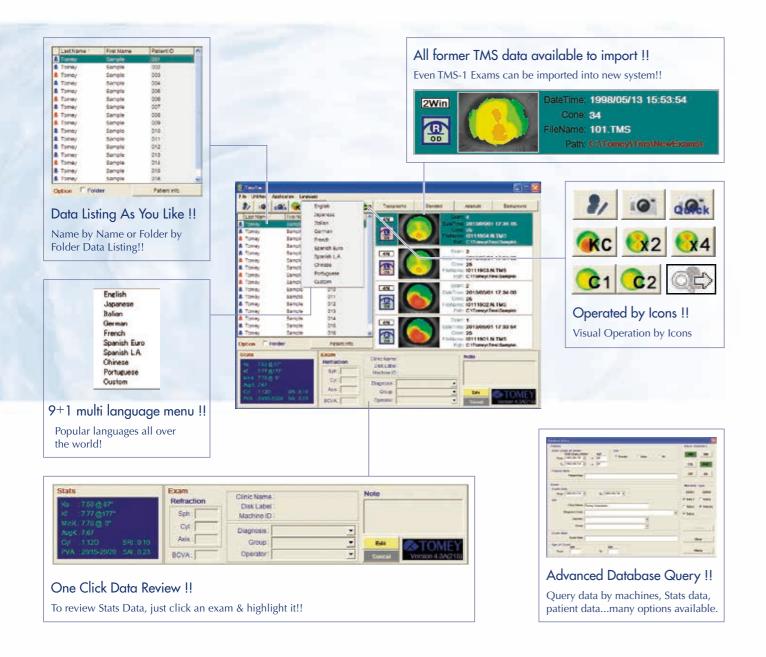


TMS-4N has the comprehensive software: Single, Dual, Multiple and you can even customize your own map with favorite scale, map type and so on. Fourier Analysis provides you the refractive information with Spherical Equivalent, Regular Astigmatism, Asymmetry and Higher order irregularity. Fourier Analysis provides the refractive information with 3mm and 6mm diameter range. The software applications, Klyce Statistics, Keratoconus Screening, Enhanced Height and Height Change Maps are also available.

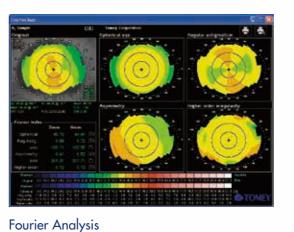

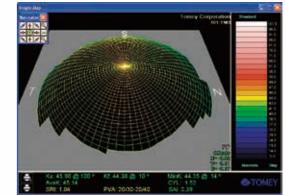

3D Corneal Map

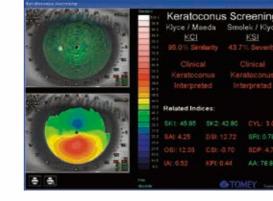

Keratoconus Screening

Statistical Indices

Simulated K, Minimum K, Average Corneal Power, Potential Visual Acuity, Surface Regularity Index, Surface Asymetry Index, Corneal Eccentricity Index, Irregular Astigmatism Index, Standard Deviation of Corneal Power, Analyzed Area, Elevation/Depression Power, Elevation/Depression Diameter, Simulated Keratometric Cylinder Change.

Contact Lens Software (Option)

TMS-1 features come back with better resolution, accuracy and easy operation. TOMEY's patented light cones use 25 or 31 rings (same as TMS-1), providing high resolution.


The laser alignment system provides high accuracy and repeatability.

The small cone design eliminates nose & brow shadow and provides extensive corneal coverage.

The low light level of the rings promotes patient comfort.



Placido Light Cone

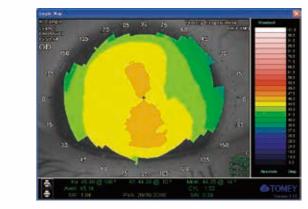

Single Corneal Map

User-defined Fitting Strategies, User-defined Lens Designs, Simulated Fluorescein Patterns, Sagittal Tear Film Plots, Adjustment of Position, Rotation and Tilt, User Modifiable Data Base, Order Form Printout, Automatic Transmission of Data to Optical Lab.